Its always the perfect fit





- Drinking
- 5 Feeding
- **1** Cow Traffic
- **17** Gates
- **71** Posts & Brackets
- **76** Cattle Handling
- 1 Cow Cubicles
- **45** Calf Equipment
- **52** Calving Gates
- 55 Enrichment & Hygiene
- 56 Sheep Equipment
- **60** Estate Fencing



Official Agri-Kit Distributor:



Agri CareTrade Rathenraw Ind. Est. Greystone Road Antrim BT41 2SJ

T: +44 (028) 9446 2266

We reserve the right to change prices without prior notification.

Photographs shown may not be the exact design. All equipment hot dip galvanised to ISO 1461 unless otherwise indicated.

Damages or discrepancies must be clearly marked on the delivery note or reported to a sales rep within 48 hours of delivery. After this time claims will not be considered.

Cancelled orders may be subject to a charge.

Drinking Solutions



- Water is a vital nutrient for livestock, and the water source should provide water of a consistently high quality to encourage animal intake of feedstuffs for optimum performance.
- Guaranteeing water meets the quality requirement of livestock was traditionally labour intensive. However, the Agri-Kit range of drinkers, featuring tipping and draining throughs and bowls, and those with protective rails, providing clean water for maximum animal performance has never been so easy.

Aqua-Drain Water Trough

Features:

- Stainless steel drinking trough
- Lift the handle to release the bung
- Tapered design for complete drainage leaves no residue
- Level bottom- compatible with automatic scraping systems
- Automatic refill flushes all impurities from the tank
- Ball valve sold separately, refer to accessories list

Code	Length	Capacity
409	1200mm	120L
407	2000mm	170L
408	3000mm	270L
415	3650mm	320L



Lengths given are from the outer edge of the mounting brackets

Aqua-Tip Water Trough

Features:

- Stainless steel drinking trough
- Lift the handle to release the drinker
- Automatic refill flushes all impurities from the tank
- Level bottom- compatible with automatic scraping systems
- Ball valve sold separately, refer to accessories list

Code	Length	Capacity
410	1120mm	45L
411	2120mm	92L
412	3120mm	142L
413	4120mm	190L

Lengths given are from the outer edge of the mounting brackets



Standard View

Tipping View

Easy Tip Drinker

Features:

- Galvanised Surround
- Stainless Steel Drinking Bowl
- Galvanised release handle
- Ideal for beef, dairy and sheep
- Ball valve sold separately, refer to accessories list
- 23 litre capacity approximately

Code	Dimensions
414	640mm x 585mm x 310mm
Tipping Dimension	640mm x 585mm x 500mm



Mini Bowl

- Available Galvanised or Stainless Steel
- 7 Litre capacity approximately
- Very Robust and Durable
- Lid can be easily removed if access required
- 1.5" drainage outlet
- Ball valve sold separately, refer to accessories list
- Simply screw the bung to drain

Code	Dimensions	Notes
423	370mm x 350mm x 190mm	Galvanised
424		Stainless Steel





Inner View

Maxi Galv


Features:

- 18" Bowl
- Built in galvanised frame
- Ideal for beef, dairy and sheep
- Ball valve sold separately, refer to accessories list
- 23 litre capacity approximately

Code	Dimensions
403	479mm x (L) 670mm (W) x 290mm (D)





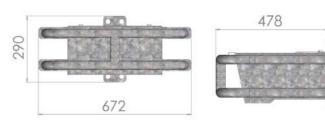



Fresh Flow



- Stainless Steel
- Built in float valve
- Plastic bung included
- Stainless steel flap to reduce manure in water
- Shallow tank design for constant supply of fresh water
- 22 litre capacity approximately

Code	Dimensions
406	730mm (W) x 430mm (D) x
400	510mm (H)









Feeding Equipment



- The Agri-Kit range of feeding equipment is fabricated using high spec galvanised steel. We use optimum quality materials to encourage animal intake of feedstuffs for optimum performance. Our range is designed to reduce feed wastage, bullying at the feed fence coupled with animal comfort and safety at all times. Understanding the pressures cows put on their feed gates on a daily basis, we have produced out gate quality standards.
- Ease of install is paramount to the users experience. Our focus is on ease of installation with our innovative flat pack delivery model, minimising delivery costs for our customers, and at the same time minimising our impact on the environment.



This equipment is Hot Dip Galvanised to BS EN ISO 1461, however, where the equipment will be in prolonged contact with silage or other mineral rich water, it is recommended that non-toxic epoxy is applied to areas of the product which will be in contact with silage, feed or water before use, and then periodically to prevent corrosion of the steel and zinc and extend the life of the equipment.

Feeding Troughs





Code	407mm Deep Trough
314	2506mm (L) x 908 (W) x 711 (H)
316	2996mm (L) x 908 (W) x 711 (H)

Code	242mm Shallow Trough
313	2506mm (L) x 908 (W) x 711 (H)
315	2996mm (L) x 908 (W) x 711 (H)

Features:

- The deep trough provides greater feed capacity making it a suitable ad-lib feeder for small animal groups
- Suitable for indoor and outdoor use
- Suitable for horned and un-horned cattle
- Heavy Duty
- Galvanised
- Supplied with vertical legs as standard


- Feet provide strength preventing animals tipping the trough
- Suitable for indoor and outdoor use
- Suitable for horned and un-horned cattle
- Heavy Duty
- Galvanised
- Supplied with vertical legs as standard





Comfort Self Lock Feed Barrier



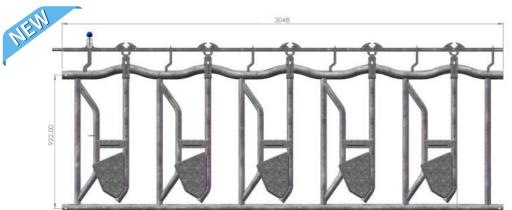



2022 Design





Standard Handle




Control Mechanism





Extension Handle



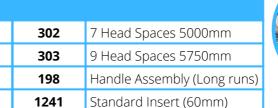



Yoke Operation



Code

317

323

319

301

Features:

• Wave top for cow comfort. Heavy duty barrier.

• Adjustable for animal safety.

when feeding.

Can be connected for long runs.

• Rubber bushed for noise reduction.

• Headspace measures 190.5mm when closed.

feeding panel into a self-locking yoke. • Manufactured using 60.3mm tube. • Hot dip galvanised to ISO 1461.

handle, using the extension handle.

• Rotate the control mechanism (B) 45 degrees to swiftly adjust the

New solid partition at the bottom of the headspace deters pushing in

The ability to operate up to 50 cattle headspaces from one operating

• A variety of panel lengths to suit your cattle housing requirements.

elimination of rubbing on the animals shoulders, neck and withers.

• Inclining the panels as the image below shows can allow total

Comfort Self Lock

5 Head Space 3048mm

6 Head Space 3800mm

7 Head Space 4350mm

7 Head Spaces 4572mm





Junior Self Lock



Code	Junior Self-Lock
723	8 Space 4750mm Self Lock 12-18 months
724	9 Space 4750mm Self Lock 6-12 months
725	10 Space 5750mm Self Lock 12-18 months
737	12 Space 5750mm Self Lock 8-12 months
1067	Telescopic Operating Handle



Release Handle


Features:


- Heavy duty
- Can be connected for long runs
- Rubber bushed for noise reduction
- Reduces bullying amongst animals





Bull Head Lock

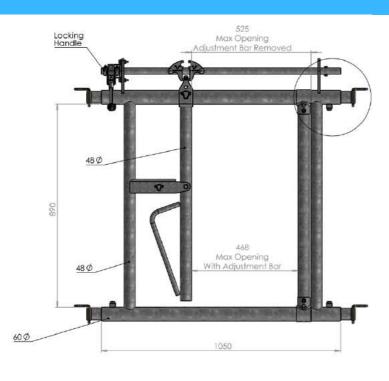

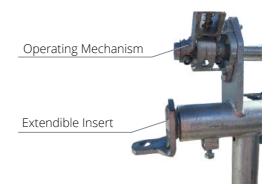


- Total unit width 1050mm
- Maximum opening width 525mm
- Operating handle is telescopic, allowing the operator to work the gate from a safe distance from animals.

Code	Size
320	Unit Width 1050mm

Diagonal Gates & Panels




Diagonal Feed Panel



- Panel: 76.1 x 3mm wall
- Divisions: 40mm tube x 3mm wall

Diagonal Feed Gate

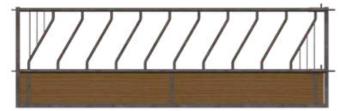

- Supplied with or without timber
- Gate: 60.3mm tube x 3.2mm wall
- 60mm box section x 3mm wall
- Divisions: 40mm tube x 3mm wall



Code	Diagonal Feeding Panel
306	4515-4850mm (14'9"-15'10")
318	5750mm (18'10")
1404	Standard insert 76mm



The standard insert provides extra length allowing the barrier to be mounted on any bay

Code	Diagonal Gate with Timber
308	4600mm (15'1")
309	4350mm (14'3")
310	2850mm (9'4")
311	3450mm (11'3")
1066	Spring pin for gate
1294	RSJ post

Refer to page 23 for brackets and hangers Refer to page 24 for hanging posts

Single & Dual Rail Feed Barriers

Single Rail Barrier



Code	Diameter x Length	
304	89mm x Metre	U bolts
305	76mm x Metre	included

Dual Rail Barrier



Code	Length	
312	6000mm (Max)	

Panel length determined by the length of 90mm pipe used





Cow Traffic Solutions




- The Agri-Kit range of cow flow gates and equipment is fabricated using high spec galvanised steel. We use optimum quality materials for durability and longevity. The Agri-Kit range of cow flow gates is designed for ease of install, ease of use and operator safety.
- Our focus is on ease of installation with our innovative flat pack delivery model, minimising delivery costs for our customers, and minimising emissions on the environment.

2 Bar Panels & 2 Bar Panel Kits



2 Bar Panel

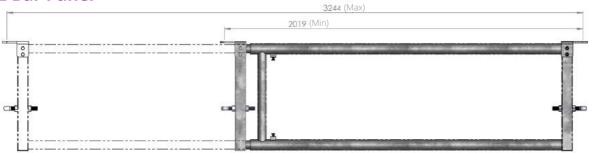


601



Code	2 Bar Panel Complete
635	1019-1499mm (3'4"-4'11")
601	2019-3244mm (6'7"-10'7")
602	3019-4244mm (9'10"-13'11")
603	4019-5244mm (13'2"-17'2")
604	5019-6244mm (16'5"-20'5")

2 Bar Panel Kit

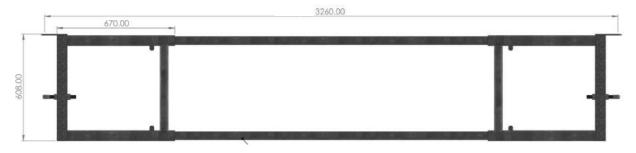




Code	2 Bar Panel Kit Complete
609	3260mm (9'10") Kit Complete
610	6260mm (19'8") Kit Complete

Kit Includes:

• 2 ends, 2 brackets, 2 lengths of pipe.

- Supplied complete with all parts
- Adjustable
- One end measures 670mm
- Panel length determined by the length of pipe used

Roll Over Gate

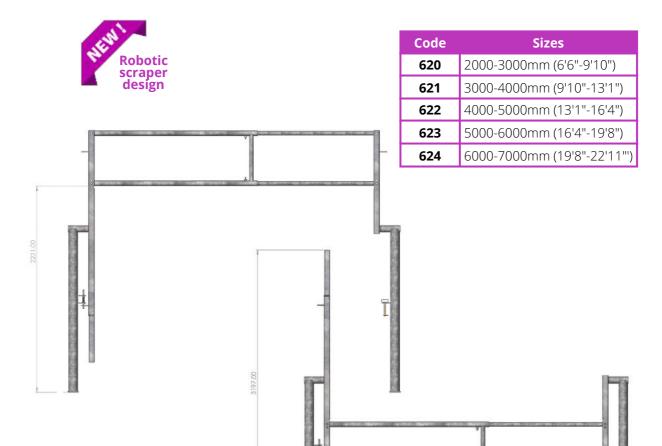

- Hot Dip Galvanised
- Features 2 bar gate
- Counter balanced for easy operation
- Adjustable width

- 2200mm Clearance when open
- Allows automatic scrapers to pass beneath
- Perfect solution for cow traffic
- Heavy duty








Images show the discontinued 3 bar design for reference only

Guillotine Gate

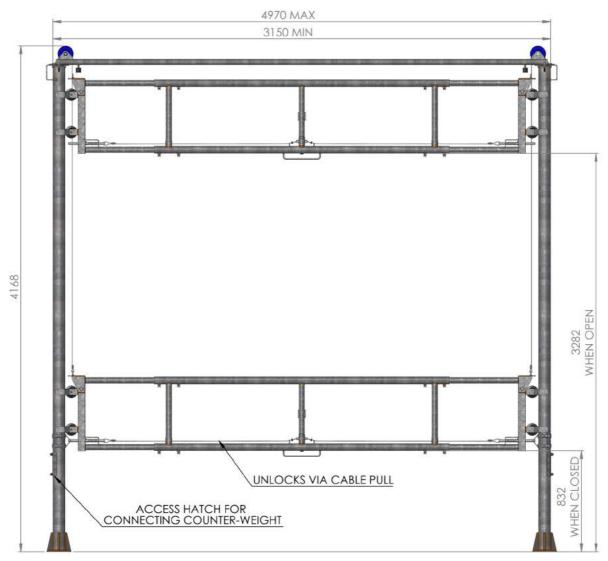

Code	Dimensions
611	3150-4970mm (10'4"-16'3")

- Hot Dip Galvanised
- Features 2 bar gate
- Counter balanced weight for easy operation
- Adjustable width
- 3300mm Clearance when open
- Allows automatic scrapers to pass beneath
- Perfect solution for cow traffic
- Heavy duty





Telescopic Feature



Heavy Duty Pully

Bungee Gate


Features:

- Concealed internal spring for safe, preventing caught tails or nipped fingers
- 360 degree swivel
- 1 metre high
- Can be locked vertically
- 2 metre telescopic range
- Ideal for cubicle shed divisions where swing gates are unsuitable



Our bungee gate features a concealed spring for safety

Code	Bungee Gate Complete
619	3048mm-5035mm (10'-16'6")
166	Bungee gate latch

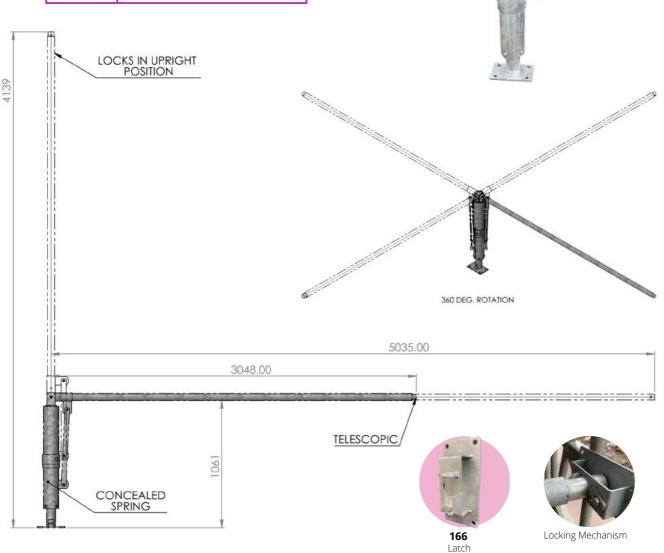

Texas Gates & Frames

Texas Gate Complete




Code	One Way Single Texas Gates
612	509mm (1'8")
614	970mm-1300mm (3'2"-4'3")

Features:

- One way cow flow
- 612 is a single gate of the texas pair (code 613)
- Mounted to wall or post
- Hot dip galvanised

Texas Double (Pair) Complete

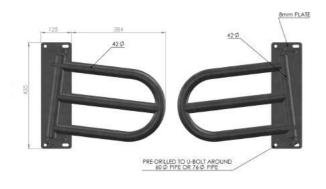


Code	Sizes
613	Pair of Small Texas Gates

Features:

- Heavy duty
- Hot dip galvanised
- Easy clean
- Pair of Texas Doors
- One gate and bracket width measures 509mm (1'8")


Texas Cow Passage Frame

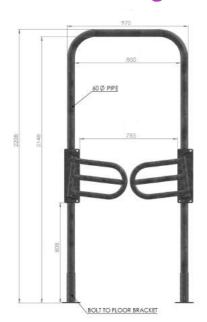

Code	Dimensions
650	2208mm H x 970mm W

- Heavy duty
- Hot dip galvanised
- Easy clean
- Doors included
- Width 3'1"
- Dimensions shown are the external of the frame

4 Bar One Way Texas Cow Passage Gate

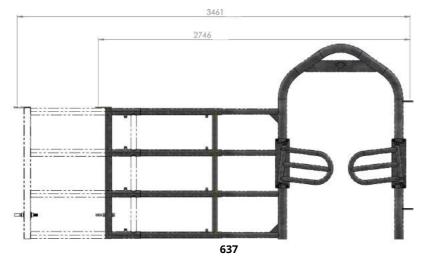


Code	4 Bar Texas Passage Gate Complete	Back Gate
636	2699mm (8'10") (Max)	Fixed End
637	2746-3461mm (9'-11'4")	1100mm
638	2824-3961mm (9'3"-12'11')	1600mm
639	3824-4961mm (12'6"-16'3")	2600mm
640	4824-5961mm (15'9"-19'6")	3600mm
641	5844-6981mm (19'2"-22'10")	4600mm

Features:


- Heavy duty
- Telescopic gate
- Hot dip galvanised
- Texas doors included

2 Bar Texas Centre Passage Kit

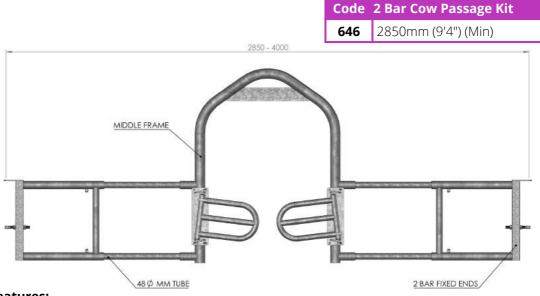

- Kit includes: central passage frame, pair of texas doors & pair of panel ends
- 48mm pipe sold separately
- Minimum length 2850mm (9'4")
- Max Length dependant on length of 48mm pipe used
- Recommended for gaps less than 4000mm (13'1")

Gates & Panels

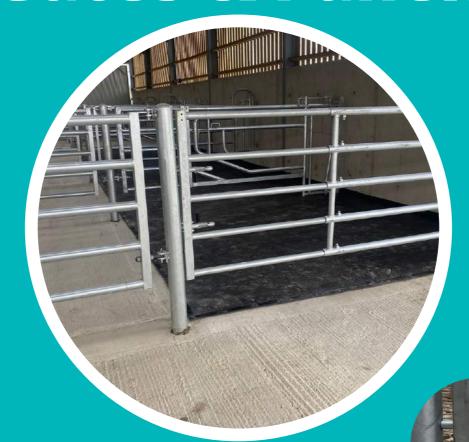

- Agri-Kit is your complete solution for Livestock Equipment.
- Our focus is on ease of installation with our range of telescopic gates designed to suit every customers requirements.
- The range of gates featured in this section feature telescopic lengths. The back section of the gate spec 60.3mm tube x 2.5mm wall and 60 mm box x 2.5mm wall.
- The front section of the gate features 48.3mm tube x 2.5mm wall and 60mm box x 2.5mm wall.
- Latches and hinges are available to transform panels into gates as the need arises.
- Our gates feature spring latch closure for minimal noise when working with animals, and to assist the operator when opening and closing gates.
- Our continued research into safe and efficient livestock equipment drives our innovation into the latest design also enabling us to offer competitively priced equipment.
- Speak to our sales team today for more information or to view our equipment.






Telescopic Length Fastener



Panel Tab

4 Bar Gates & Panels

4 Bar Gate

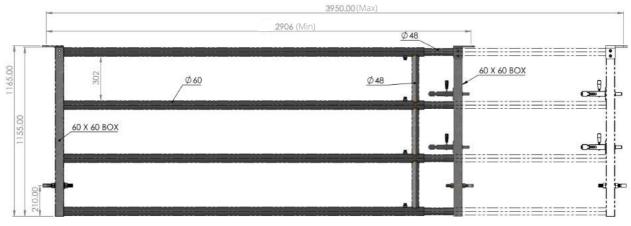





Code	4 Bar Gate
567	Required Length-1680mm (5'6")
531	1405-1949mm (4'7"-6'4")
532	1906-2950mm (6'3"-9'8")
533	2906-3950mm (9'6"-12'11")
534	3905-4949mm (12'9"-16'2")
535	4925-5969mm (16'1"-19'7")
536	6161-7205mm (20'2"-23'7")

4 Bar Panel




Code	4 Bar Panel
569	Required Length-1680mm (5'6")
537	1405-1949mm (4'7"-6'4")
538	1906-2950mm (6'3"-9'8")
539	2906-3950mm (9'6"-12'11")
540	3905-4949mm (12'9"-16'2")
541	4925-5969mm (16'1"-19'7")
542	6161-7205mm (20'2"-23'7")

5 Bar Gates & Panels



5 Bar Gate

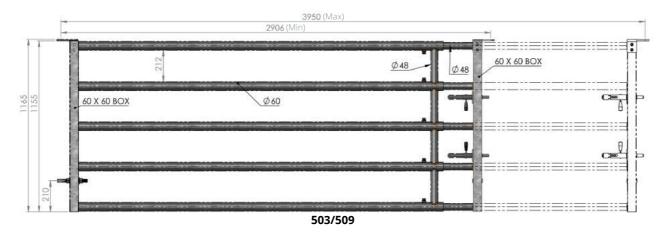



Code	5 Bar Gate
568	Required Length-1680mm (5'6")
501	1405-1949mm (4'7"-6'4")
502	1906-2950mm (6'3"-9'8")
503	2906-3950mm (9'6"-12'11")
504	3905-4949mm (12'9"-16'2")
505	4925-5969mm (16'1"-19'7")
506	6161-7205mm (20'2"-23'7")


5 Bar Panel




Code	5 Bar Panel
570	Required Length-1680mm (5'6")
507	1405-1949mm (4'7"-6'4")
508	1906-2950mm (6'3"-9'8")
509	2906-3950mm (9'6"-12'11")
510	3905-4949mm (12'9"-16'2")
511	4925-5969mm (16'1"-19'7")
512	6161-7205mm (20'2"-23'7")

Worker Access Gates

4 Bar Worker Access Gate

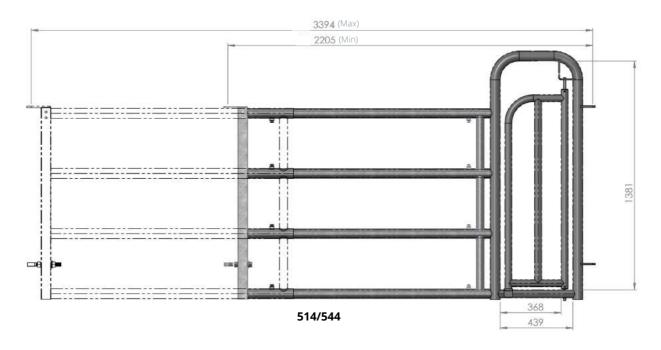



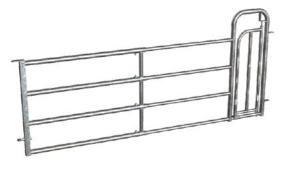

Code	4 Bar Worker Access Gate	
543	Min Required-2201mm (7'2") (Max)	
544	2205-3394mm (7'2"-11'1")	
545	3201-4390mm (10'6"-14'4")	
546	4200-5389mm (13'9"-17'8")	
547	5220-6409mm (17'1"-21')	
548	6456-7645mm (21'2"-25'1")	


5 Bar



Code	5 Bar Worker Access Gate	
513	Min Required-2201mm (7'2") (Max)	
514	2205-3394mm (7'2"-11'1")	
515	3201-4390mm (10'6"-14'4")	
516	4200-5389mm (13'9"-17'8")	
517	5220-6409mm (17'1"-21')	
518	6456-7645mm (21'2"-25'1")	

Nozzle Cut Out Gates

5 Bar Nozzle Cut Out Gate

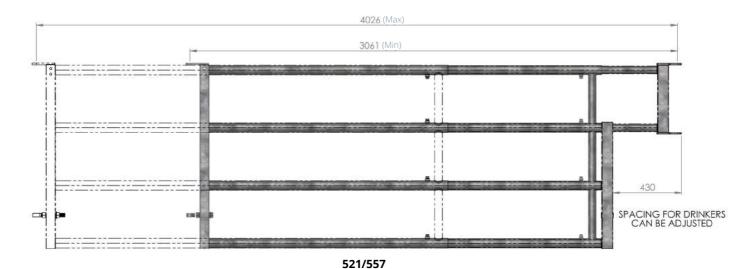

4 Bar



Code	4 Bar Gate Back	
555	1763mm (5'9") Max	Fixed End
556	2061-3026mm (6'9"-9'11")	1600mm
557	3061-4026mm (10'-13'2")	2600mm
558	4061-5026mm (13'3"-16'5") 3600mm	
559	5080-6045mm (16'8"-19'10")	4600mm
560	6316-7281mm (20'8"-23'10")	5850mm

5 Bar



Code	5 Bar Gate	Back
519	1763mm (5'9") Max	Fixed End
520	2061-3026mm (6'9"-9'11")	1600mm
521	3061-4026mm (10'-13'2")	2600mm
522	4061-5026mm (13'3"-16'5")	3600mm
523	5080-6045mm (16'8"-19'10")	4600mm
524	6316-7281mm (20'8"-23'10")	5850mm

Drinker Gates & Panels


526



Maxi Galv bowl drinker and 5 Bar Drinker Front Panel

Code	5 Bar Drinker Front Panel	
525	Min Required-1763mm (5'9") (Max)	
526	2146mm-3026mm (7'-9'11")	
527	3146mm-4026mm (10'3"-13'2")	
528	4146mm-5026mm (13'7"-16'5")	
529	5166mm-6046mm (16'11"-19'10")	
530	6402mm-7282mm (21'-23'10")	

5 Bar Drinker Back Gate

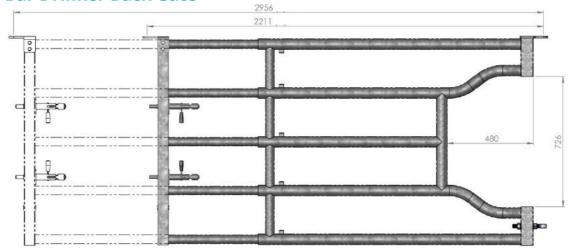




Refer to page 16 for gate and panel specs
Refer to page 23 for hanging posts
Refer to page 24 for hangers and brackets

Code	5 Bar Drinker Back Panel	
572	2211-2956mm (7'3"-9'8")	
591	2919-3956mm (9'6"-12'11)	
592	3917-4956mm (12'10"-16'3")	
593	4908-5956mm (16'1"-19'6")	
594	5908-6956mm (19'4"-22'9')	

Left: Discontinued 4 bar drinker back panel for reference

Sheeted Doors

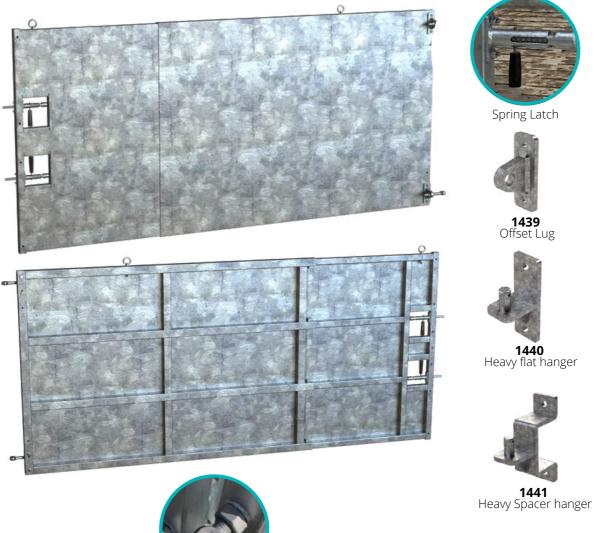

Eye bolt




- Manufactured using 60mm box on back and 50mm box on front
- Standard height 1500mm
- Double non-return latch
- Slam plate included
- M24 eye bolts included
- Galvanised sheet
- Supplied complete with eyebolts
- Hanger sold separately
- Telescopic Lengths
- Lifting eyes for safe and easy install
- Any Handed

Code	Lengths
5002	1495-2495mm (4'10"-8'2")
5003	2495-3495mm (8'2"-11'5")
5004	3495-4495mm (11'5"-14'8")
5005	4495 -5495mm (14'8"-18')
5006	5495-6495mm (18'-21'3")

Hanging Posts



Posts

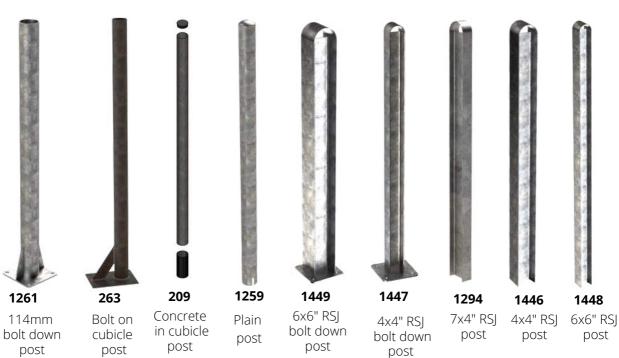

Post Type	Height
Concrete in	2000mm
Bolt down	1600mm

Standard Posts (114MM) Codes:



Refer to page 24 for hangers and alternative bolt on brackets



Concrete in Post



7x4" RSJ Post

Hanging Brackets



Brackets







1290 Long Wall Hanger



1018 Heavy flat hanger



1017 Fixed Hanger Extended



1239 Pin Hanger



1279Bolt Support Universal



199 Extended Pin Hanger



1D bracket (Code 1350)

1424, 1425 D-Latch



114mm Brackets

1 Direction bracket



2 Direction bracket



3 Direction bracket




1353 4 Direction bracket




1354 90 degree bracket


114mm Brackets to go around plain posts codes:











Cattle Handling



- Agri-Kit offers a complete range of livestock handling equipment.
 Our range has been developed following our teams experience on
 farms throughout the world. Our continued research into safe and
 efficient livestock equipment drives our innovation into the latest
 design also enabling us to offer competitively priced equipment.
- Speak to our sales team today for more information or to view our equipment.
- All crush gates within this section are compatible with the Agri-Kit head scoop.

Crush Gates & Extras

Auto Universal Crush Gate



Code

606

Auto Universal Crush Gate Complete

Semi-Auto Crush Gate



Code

Semi-Auto Crush Gate Complete

Semi-Auto Slim Line Crush Gate



Code

Semi-Auto Slim Line Crush Gate Complete

Friction Lock Crush Gate & Extras



Code

Friction Lock Crush Gate





Friction lock crush gate shown with front gate and extension handle

Code	
648	Friction Lock Front Gate
649	Crush Extension Handle

Manual Crush Gate

Code	Components
607	Manual Crush Gate
1397	Front Gate LH
1398	Front Gate RH
608	Head Scoop Complete

Features:

- Heavy Duty
- Galvanised
- Designed for beef and dairy cattle



Head Scoop






- Squeeze release control
- Friction locking mechanism
- Compatible with all Agri-Kit crushes



Sliding Back Gate

Code	Dimensions
631	Closed: 1013mm W
	Open: 1799mm W

- Galvanised
- Sliding door for back of crush
- Pre-drilled for pin hangers
- Compatible with any crush race
- Closed unit dimensions: 1013mm (W) x 210mm (D) x 2125mm (H)

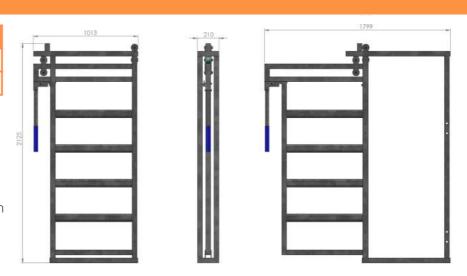

Crush Race





Code	Crush Posts
615	End post with holes
616	Through post with holes
617	Corner post with holes
1015	48mm Pipe
1383	Pipe sleeve (114mm)




1383





Crush Race

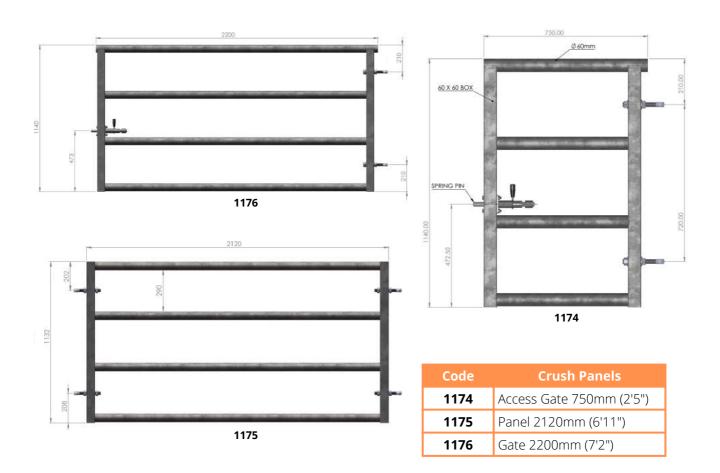

Our team will provide advice and equipment to deliver you the safest & most efficient handling facility.






Above: Friction Lock Crush Gate & Front Gate

Premium Cattle Hurdle



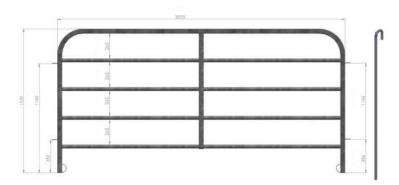

Features:

- Galvanised steel
- Quick and easy to assemble
- Offset tabs to join to other cattle hurdles
- Ideal for setting up in the field or on the farm yard
- Foot plates preventing sinking into soft ground
- Supplied with 1 joining pin per hurdle



Code	Cattle Hurdle
801	3055mm (L) x 1530mm (H) 10' (L) x 5' (H)

Hoof Crush




- Heavy Duty
- Designed for Safety & Portability

Code	Hoof Crush
645	Info on Request





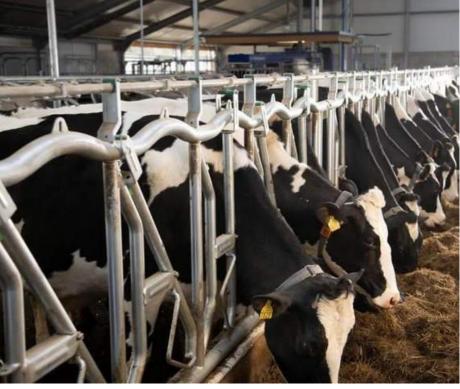
































































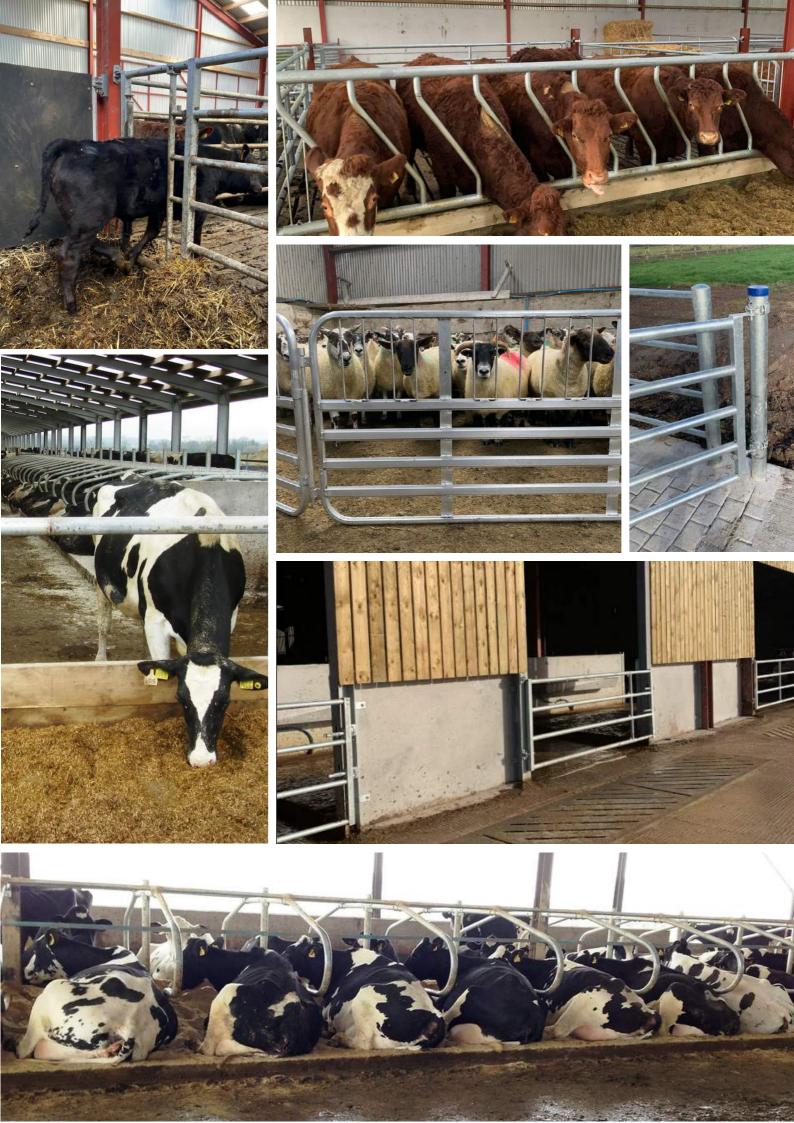


Cow Cubicles



- Agri-Kit cow cubicles are designed for optimum comfort and longetivy. They are highly robust and our flat pack delivery method allows us to minimise the delivery cost for our customers, as well as minimising environmental impact.
- Available in rail, floor or post mount, our cubicle range will have what your looking for.
- Every cow in the herd should have a cubicle, with the dimensions based on cow size. Our team will be happy to help you select your required cow stall.
- The Agri-Kit also provides calf cubicles, which are included in the calf range.

Post Mount Cubicles

Single Post Mount Cubicle Assembly

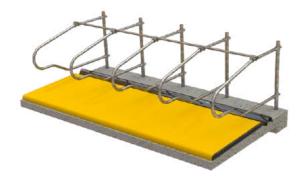

A cubicle assembly includes cubicle loop(s), post, brackets and excludes neck bar which is sold separately.

Refer to price list for additional parts e.g. neck bar.

Code	Cow Loop Length
201	1850mm
202	1960mm
203	2160mm
204	2340mm

Code	Heifer Loop Length
222	1850mm
223	1960mm
224	2160mm
225	2340mm

Double Post Mount Cubicle Assembly



A cubicle assembly includes cubicle loop(s), post, brackets and excludes neck bar which is sold separately.


Refer to price list for additional parts e.g. neck bar.

Code	Cow Loop Length
205	1850mm
206	1960mm
207	2160mm
208	2340mm

Code	Heifer Loop Length
226	1850mm
227	1960mm
228	2160mm
229	2340mm

Floor Mount Cubicles

Single Floor Mount Assembly

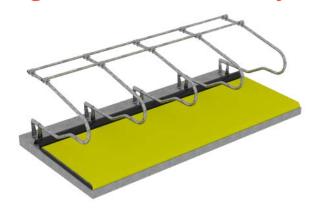

A cubicle assembly includes cubicle loop(s), post, brackets and excludes neck bar which is sold separately.

Refer to price list for additional parts e.g. neck bar.

Code	Cow Loop Length
210	1850mm
211	1960mm
212	2160mm
213	2340mm

Code	Heifer Loop Length
230	1850mm
231	1960mm
232	2160mm
233	2340mm

Double Floor Mount Cubicle Assembly



A cubicle assembly includes cubicle loop(s), post, brackets and excludes neck bar which is sold separately.


Refer to price list for additional parts e.g. neck bar.

Code	Cow Loop Length
214	1850mm
215	1960mm
216	2160mm
217	2340mm

Code	Heifer Loop Length
234	1850mm
235	1960mm
236	2160mm
237	2340mm

Wall Mount Cubicles

Wall Mount Cubicle Assembly

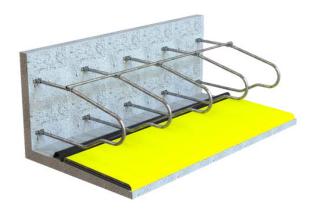

A cubicle assembly includes cubicle loop(s), post, brackets and excludes neck bar which is sold separately.

Refer to price list for additional parts e.g. neck bar.

Code	Cow Loop Length
218	1850mm
219	1960mm
220	2160mm
221	2340mm

Code	Heifer Loop Length
238	1850mm
239	1960mm
240	2160mm
241	2340mm



Calf Equipment



- The Agri-Kit range of calf equipment is highly robust and our flat pack delivery method allows us to minimise the delivery cost for our customers.
- We offer a complete range of calf gates, feeding equipment, bespoke pens and handling equipment. The complete range is fabricated using high spec galvanised steel.
- Please speak to a member of our team who will be happy to help you.


Calf Feeding Equipment



5 Bar Calf Passage Gate



Code	5 Bar Calf Passage Gate
702	2600-3316mm (8'6"-10'10")
703	2621-3816mm (8'7"-12'6")
704	3621-4816 mm (11'10"-15'9")
705	4621-5816 mm (15'1"-19'1")
706	5621-6816mm (18'5"-22'4")

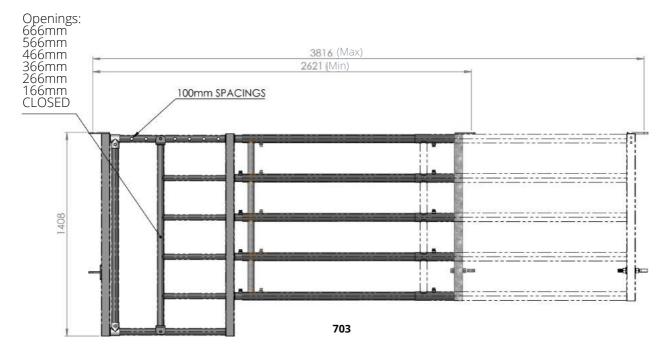



HEAVY DUTY!

The calf creep gate is heavy duty, designed for any suckler herd.


The telescopic length makes it suitable as a dividing gate for a wide range of pen sizes.

Creep feeding calves from early life is necessary to compliment optimum daily gains and achieve target weights, whether calves are intended for breeding or beef production.

Calf Feeding Equipment



Calf Diagonal Feeding Panel

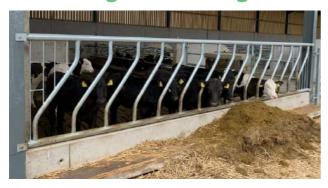

Code	Calf Diagonal Panel
734	4490mm (14'8") Complete

Features:

- Heavy duty
- 17 Feed spaces standard length
- Can be manufactured into the required length on request

Calf Diagonal Feeding Barrier with Timber




Code	Calf Diagonal with Timber
735	4600mm (15'1") Complete

Features:

- Heavy duty
- 17 Feed spaces standard length
- Can be manufactured into the required length on request

5 Bar Calf Gate

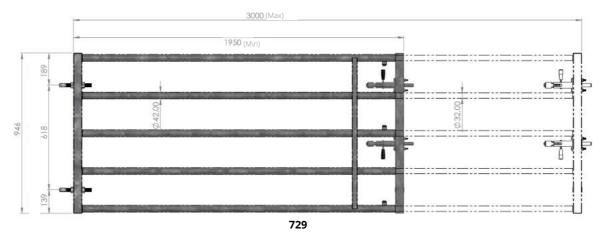



Code	5 Bar Calf Gate		
744	5 Bar Calf Gate with fixed end	730	2950-4000mm (9'6"-13'1")
728	950-2000mm (6'4"-9'8")	731	3950-5000mm (12'9"-16'4")
729	1950-3000mm (6'4"-9'8")	732	4950-6000mm (16'2"-19'6")

Calf Feeding Equipment





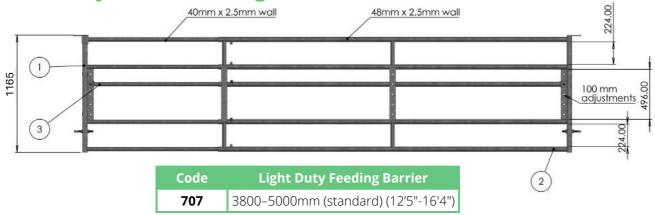

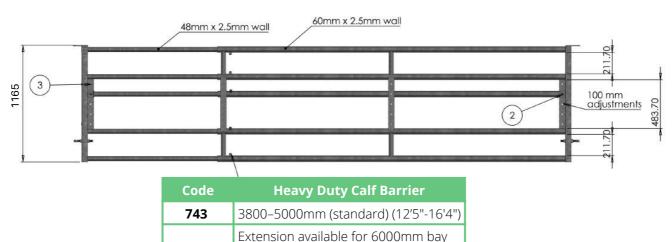








Calf Self Lock

Calf Self Lock Panel (No Timber)

Features:

- Galvanised steel
- Quick and easy to assemble
- Offset tabs to join to other cattle hurdles
- Reduces bullying amongst animals
- Supplied with operating handle

Code	Size	
749	9 Space 4196mm (13'9")	

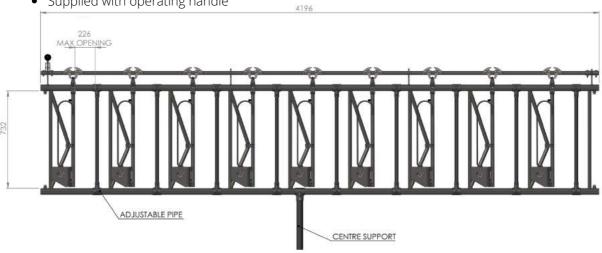

Calf Self Lock Gate (With Timber)





Adjustable Eye Bolt



Locking Mechanism



Locking Yoke / Feeding Panel Control Mechanism


Calf Equipment



Complete Calf Self Lock Front Pen



Code	Calf Pen
738	6 Space Calf Self Lock Front
739	Calf Pen Side Panel
1388	5 LTR Milk Bucket Holder
1389	9 LTR Milk Bucket Holder
1390	Calf Self Lock Pin
1391	Calf Self Lock Wall Mount
1392	Calf Self Lock T Joint
1399	6 Space Milk Feeder

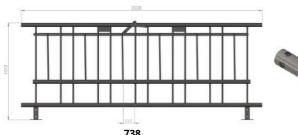



1399
Calf Feeding Space
Protector- 6
supplied with panel





738Calf Self Locking Panel





1391 Wall Mount Bracket

1399 6 Space Milk Feeder (side view)



Calf Feeder



Code	Dimensions
708	1234mm (L) x 505mm (D) x 710mm (H)

Calf Equipment cont.








Features:

- Non slip rubber flooring
- Fold down handles
- Chin rest
- Belly Scoop
- Rubber grip handles
- Heavy duty wheels


Calf Cubicles

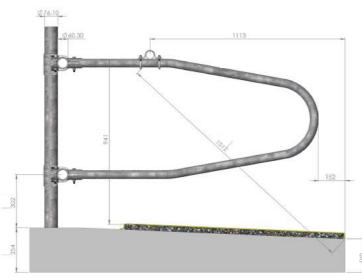

A cubicle assembly includes cubicle loop(s), neck bar clamps and T clamp assembly. Posts, 60mm rail and collar brackets are sold separately. Refer to price list for additional parts.

Code	Calf Cubicles Assembly
714	C37 Single 62"
715	C37 Double 62"
718	C32 Single 52"
719	C32 Double 52"

Code	Calf Cubicle Parts
262	Concrete in Post Assembly
1101	Pipe 60mm x 5800mm (L)
1021	Collar Bracket & U Bolts

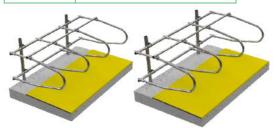



Other Cattle Equipment




- The Agri-Kit range is continually evolving as our research into animal welfare and handling continues, and as customer needs arise.
- This section features our range of calving gates and additional parts, and our cattle enrichment product, the AgriCow Pendulum Cow Brush.
- The Agri-Cow brush is the only product offered within the Agri-Kit range
 which is not designed on site. We chose to offer this product as the cow
 brush is the most efficient and optimum on the market, while the Agri-Cow
 ethos and objective to deliver quality and affordable equipment to farmers
 are aligned with those of Agri-Kit.

Standard Calving Gate

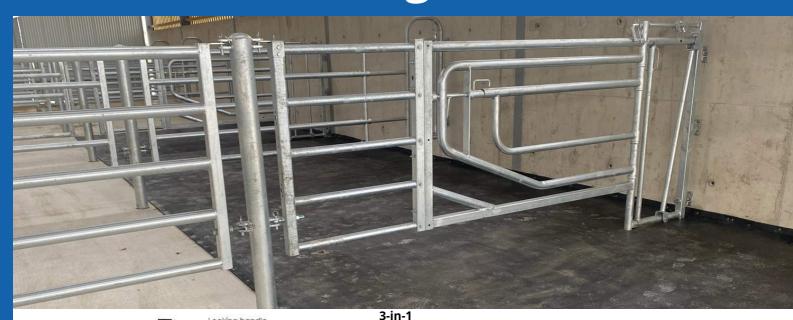

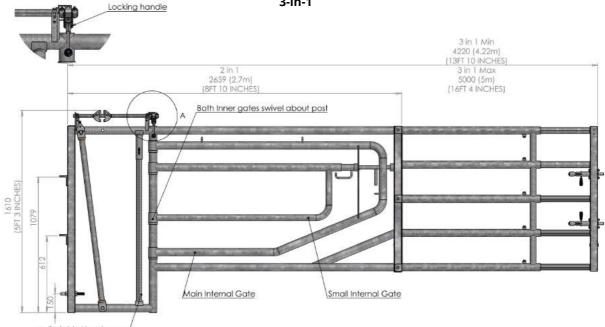

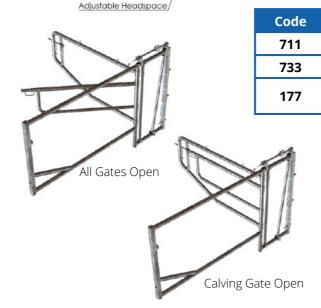



Locking Mechanism

Features:

710mm (2'3")

Spring latch closure

2-in-1: 2659mm (8'8")

3-in-1: 4220mm (13'10")


Min - 5000mm (16'4") Max

• For Beef and Dairy cows

Size

- Cow can be yoked to assist calving
- Internal gate allows fast and speedy access to perform a Caesarean section
- Low safe exit from yoke in case of animal going to ground
- An ideal pen divider to service calving in both pens.



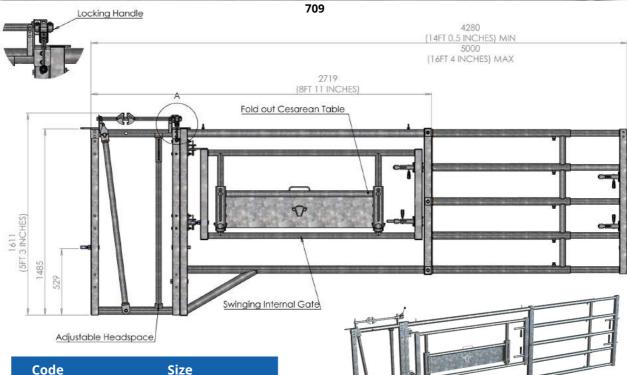


Code	Size
709	4280mm (14') - 5000mm (16'4")
710	2719mm (8'11")
711	710mm (2'3")

Features:

- 5 Rail side gate with 3 removable rails
- Cow can be yoked to assist calving
- Three removable rails allow suckling of calf to mother or to perform Caesarean section
- Low safe exit from yoke in case animal goes to the ground
- Calving Unit with extension gate 4280mm (Min) 5000mm (Max)





709 3-in-1 Calving Gate Deluxe

Calving Gate Head Lock

2-in-1 Calving Gate Deluxe


Cow Brush





Code	Size
901	500 x 1000mm

Technical		
Brush size	1000mm	
Weight	87Kg	
Power	0.5Cv	
Motor	220volt – 50/60hz - 110volt – 50/60hz	
Power Consumption	0.55 Kw	

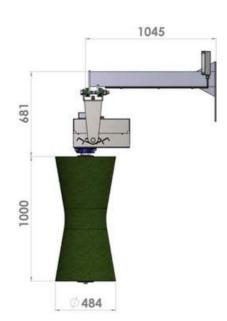

Features:

- Pendulum Swivel Brush
- Features the longest brush head available on the market
- Suitable for beef and dairy cattle
- Available in a range of colours
- Energy efficient, requiring a standard 13amp socket power supply
- Supplied complete with mounting stand or can be mounted on an RSJ as shown in the images

Boot Blast

Code	Size
2027	320mm W x 260mm D x 400mm H

Features:

- Stainless Steel
- Central footrest bar to place the boot on
- Dual pressure nozzles beneath eject the water vertically at the underside of the boot
- The covered system prevents the residue of the boot contaminating the user
- Effective biosecurity feature on all farms



Hose Attachment



Foot rest and pressure jet nozzle



Sheep Equipment



- Agri-Kit's range of sheep equipment has been inspired by market leaders and sheep farmers who know first hand the intensive labour requirement involved with sheep production.
- The Agri-Kit range has been designed for robustness, longevity and ease of use, with a diverse range of product sizes and all products manufactured using the highest quality materials.
- We offer quality equipment at the most competitive rates on the market. Speak to a member of our team today who will be happy to help you.



The galvanised equipment offered by Agri-Kit is Hot Dip Galvanised to BS EN ISO 1461, however, where the equipment will be in prolonged contact with silage or other mineral rich water, it is recommended that non-toxic epoxy is applied to areas of the product which will be in contact with the corrosive and then periodically thereafter to prevent corrosion of the steel and zinc and therefore extend the life of the equipment.

Sheep Feeding Equipment



Sheep Trough





Features:

- Heavy duty plastic
- Fits over hurdles and gate rails
- 900mm (L) x 350mm (W) x 200mm (D)
- Suitable for sheep and calves
- Easily moved

Code	Sheep Hanging Trough	
901	900mm (L) x 350mm (W) x 200 (D)	



Code	Transportable Feeder
902	2500mm (L) x 750mm (H) x 700 (D)

Supplied with ball hitch upon ordering, handle supplied

- Galvanised sheeted
- Flow control plates to regulate feed
- Fully constructed from pre-galvanised sheet with pressed creases throughout the design to offer extra strength
- Two spring claw latches for security

Sheep Feeding Equipment



Adjustable Rail Sheep Feed Barrier








Code	Adjustable Sheep Feed Barrier
903	4580mm (15'5") Max

Adjustable Rail Sheep Feed Barrier with Access Gate

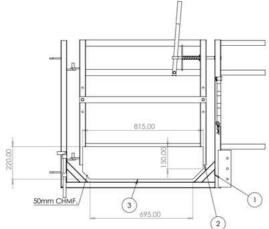

Code	Adjustable Sheep Feed Barrier
904	1100mm (3'7") Swing Gate

Part	
1	Frame
2	Swinging Gate
3	Galv sheet on Gate








Sheep Handling Equipment



Aluminium Sheep Hurdles

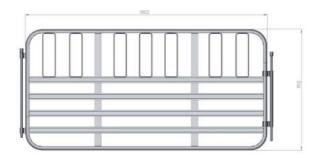

Features:

- Lightweight yet extremely durable
- Supplied with one connecting rod

	Aluminium Sheep Hurdle
809	1802mm (5'10") (L) x 902mm (H)





Sheep Swinging Gates



Code	Sheep Swinging Gate
806	670mm (2'2")
807	1005mm (3'3")
808	2011mm (6'7")

Features:

- Heavy duty
- Available in 2'2ft, 3'4ft and 6'6ft
- Supplied with two connecting pins

Sheep Gate and Hurdle Combos




Code	Sheep Gate & Hurdle Combo
810	2011mm (6'7")
811	3048mm (10')

Features:

- Heavy duty and extremely durable
- Supplied with one connecting rod

Estate Fencing

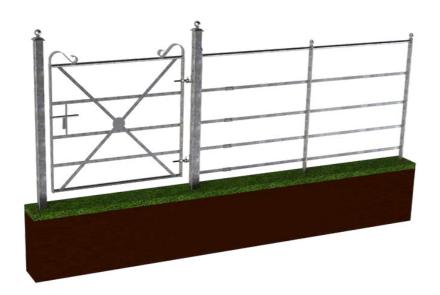

Features:

- Hot Dip Galvanised
- Ornate 1100mm Gate & Estate Post
- Adds elegance and class to any residential or commercial property

Code	Estate Fencing
1394	Gate 609mm (2')
1395	Ornate Post 1005mm (3'3")

Code	Estate Fencing
1197	Single Post
1198	Pipe joiner
1199	Flat joiner
1200	Electric Wire Holder
1202	Pipe 26.55mm X 2.5mm (6m Length)
1203	25mm X 8mm Flat Bar (6m Length)

Our galvanised estate fencing components are supplied galvanised as standard. We do not colour coat this product as the sun often causes coatings to fade. Therefore for those customer desiring black or white estate fencing we recommend painting it.







T: +44 (0)28 9446 2266 www.agricaretrade.com